



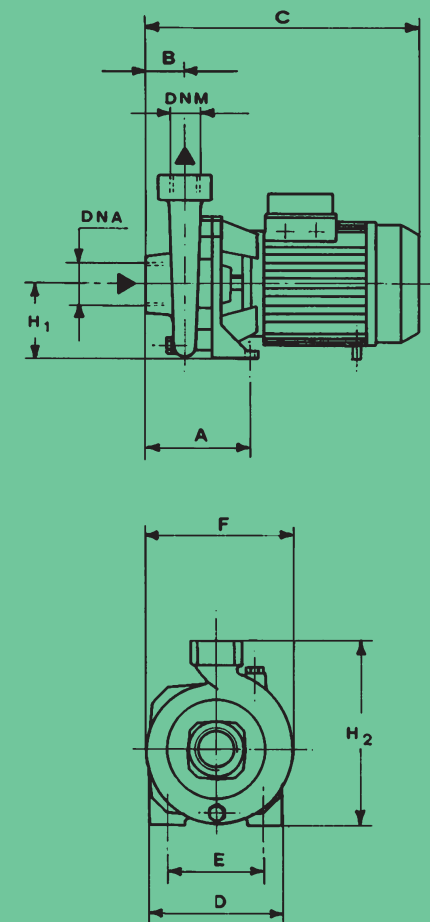






per caratteristiche-varianti costruttive pag. 80 - for features schedule-constructional variances pag. 80

TIPO - TYPE		P ₂ nom.		P ₁ (kW) CAx.		AMPERE		Q = portata - débit - capacity - Fördermenge - caudal							
1 ~ 230 V - 50 Hz	3 ~ 230/400 V - 50 Hz	HP	kW	1 ~	3 ~	1 ~	3 ~	m ³ /h 2.4 4.8 7.2 9.6 12 14.4 16.8							
								l/1' 40 80 120 160 200 240 280							
								Prevalenza CAometrica totale in m. C.A. Hauteur CAométrique totale en m. - Total head in meters w.c. Förderhöhe m. - Altura de impulsión CAométrica total en m.							
CR 75	CRT 75	0.8	0.59	0.73	0.83	3.4	1.5	14.5	13.5	12.5	11.3	9.5	7	-	-
CR 100	CRT 100	1	0.74	1.14	1.2	5.3	2.4	20	19.2	18.5	17.3	15.5	13.5	10.5	-
CR 76	CRT 76	0.8	0.59	0.73	0.83	3.4	1.5	14.5	13.5	12.5	11.3	9.5	7	-	-
CR 102	CRT 102	1	0.74	1.14	1.2	5.3	2.4	20	19.2	18.5	17.3	15.5	13.5	10.5	-

TIPO TYPE	Dimensioni mm Dimensions mm Dimensions mm Masstabelle mm Dimensiones mm										Dimensioni imballo mm Dimensions d'emballage mm Packing dimensions mm VerpackungCasse mm Dimensiones embalaje mm				Peso Poids Weight Gewicht Peso
	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L	M		kg
CR 75	120	45	308	155	115	170	97	222	1"1/2G	1"1/4G	325	200	265		12.2
CR 100	120	45	308	155	115	170	97	222	1"1/2G	1"1/4G	325	200	265		13.5
CR 76	120	45	308	155	115	170	97	222	1"1/2G	1"1/2G	325	200	265		12.2
CR 102	120	45	308	155	115	170	97	222	1"1/2G	1"1/2G	325	200	265		13.5

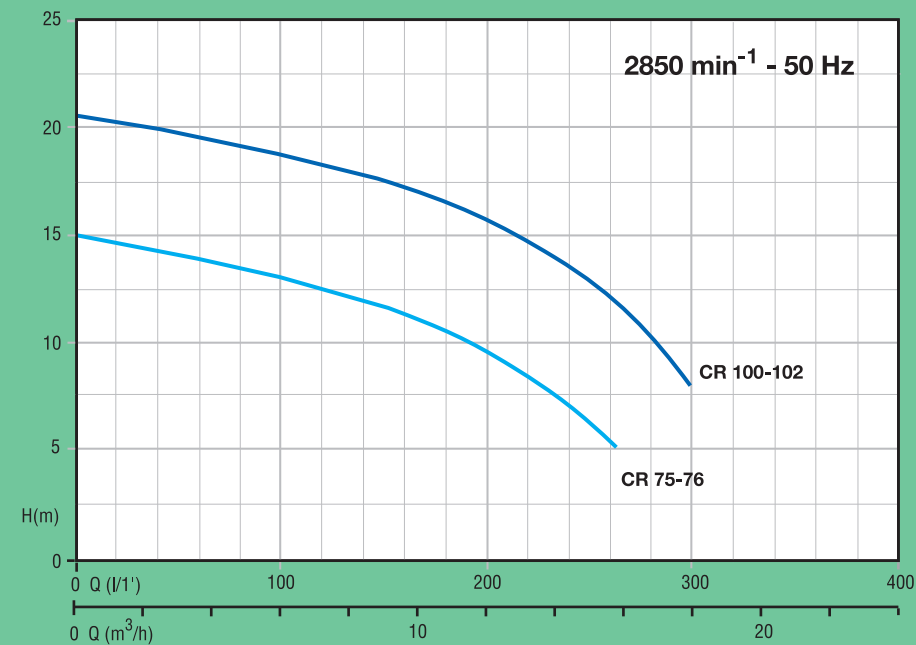

- **serie CR**
elettropompa centrifuga
a girante aperta
- **serie CR**
electropompe centrifuge
à turbine ouverte
- **serie CR**
open impeller centrifugal
electric pump
- **baureihe CR**
Kreisel-Elektropumpen
mit offenem Laufrad
- **serie CR**
electrobomba centrífuga
de rodete abierto



CENTRIFUGHE
centrifugal electric pumps